

SUS304パンチング板

1000×2000

厚さ×孔径×ピッチ	厚さ×孔径×ピッチ	厚さ×孔径×ピッチ	厚さ×孔径×ピッチ
0.3 × 0.5 × 1.09	0.8 × 5 × 8	1.2 × 3 × 5	2.0 × 10 × 15
0.4 × 0.5 × 1.09	6 × 8	4 × 7	12 × 18
3 × 5	6 × 9	5 × 8	15 × 20
0.5 × 1 × 2	8 × 10	6 × 9	20 × 30
1.5 × 3	10 × 15	8 × 10	3.0 × 3 × 5
3 × 4	1.0 × 1 × 2	8 × 12	5 × 8
3 × 5	1.5 × 3	10 × 15	8 × 12
5 × 8	2 × 3	1.5 × 2 × 3.5	10 × 15
0.6 × 0.8 × 1.55	2 × 3.5	3 × 5	0.3 × ○ × +
1 × 2	2.5 × 4	4 × 7	0.4 × ○ × +
2 × 3.5	3 × 4	5 × 8	0.5 × ○ × +
3 × 5	3 × 5	6 × 8	0.6 × ○ × +
4 × 7	4 × 5	6 × 9	0.8 × ○ × +
5 × 8	4 × 7	8 × 12	1.0 × ○ × +
6 × 9	5 × 7	10 × 15	1.2 × ○ × +
8 × 10	5 × 8	12 × 18	1.5 × ○ × +
0.8 × 1 × 2	6 × 8	15 × 20	0.8 × 長孔3 × 12
1.5 × 3	6 × 9	20 × 30	0.8 × 長孔3 × 20
2 × 3.5	8 × 10	2.0 × 3 × 5	1.0 × 3角 × 5並列
3 × 4	8 × 12	4 × 7	1.0 × 8角 × 10並列
3 × 5	10 × 15	5 × 8	1.5 × HL10 × 15SPV
4 × 7	12 × 18	6 × 9	
5 × 7	1.2 × 2 × 3.5	8 × 12	

1219×2438


厚さ×孔径×ピッチ	厚さ×孔径×ピッチ	厚さ×孔径×ピッチ	厚さ×孔径×ピッチ
0.8 × 3 × 5	1.0 × 5 × 8	1.2 × 10 × 15	1.5 × 10 × 15
5 × 8	10 × 15	1.5 × 3 × 5	2.0 × 5 × 8
10 × 15	1.2 × 3 × 5	5 × 8	10 × 15
1.0 × 3 × 5	5 × 8	6 × 9	1.5 × HL10 × 15SPV

SUS304エキスパンドメタル(1)

品番	メッシュ寸法(mm)		ストランド寸法(mm)		1枚重量(kg)	
	SW	LW	T	W	1m×2m	4'×8'
31	12	30.5	1.2	1.5	4.76	7.07
32	〃	〃	1.5	2.0	7.94	11.8
33B	〃	〃	2.0	2.5	13.2	19.6
33	〃	〃	2.0	3.0	15.9	23.6
41	22	50.8	1.5	2.0	4.32	6.42
42B	〃	〃	2.0	2.0	5.76	8.56
42	〃	〃	2.0	2.5	7.20	10.7
43B	〃	〃	3.0	3.0	13.0	19.3
43	〃	〃	3.0	3.5	15.2	22.5
61B	34	76.2	2.0	2.0	3.74	
C-20	〃	〃	2.0	2.5	4.66	6.92
61	〃	〃	2.0	3.0	5.60	
62C	〃	〃	3.0	3.0	8.40	12.5
62B	〃	〃	3.0	3.5	9.80	14.6
62	〃	〃	3.0	4.0	11.2	16.6
63D	〃	〃	4.0	4.5	16.8	24.9
63B	〃	〃	4.5	4.5	18.9	28.1
63	〃	〃	4.5	5.0	21.0	31.2
20C	36	101.6	4.0	4.5	15.9	23.6
20B	〃	〃	4.0	5.0	17.6	26.2
20	〃	〃	4.5	5.0	19.8	29.5
21	〃	〃	4.5	7.0	27.8	41.3
D-50	〃	〃	5.0	6.0	26.6	39.5
22B	〃	〃	6.0	6.0	31.8	47.3
22	〃	〃	6.0	7.0	37.0	55.0
E-40	34	135.4	4.0	5.0	18.7	27.7
E-45	〃	〃	4.5	5.0	21.0	31.2
E-50	〃	〃	5.0	6.0	28.0	41.6

SUS304エキスパンドメタル(2)

品番	メッシュ寸法(mm)		ストランド寸法(mm)		1枚重量(kg)	
	SW	LW	T	W	1m×2m	4'×8'
E-60	34	135.4	6.0	7.0	39.2	58.2
383	38	100.0	3.0	3.5	8.76	
714	7	14.0	0.8	0.8	1m×1m	
820	8	20.0	0.8	0.8	1m×1m	

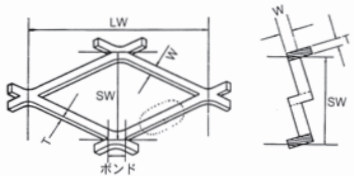

SW:メッシュ短目方向の中心間距離
 LW:メッシュ長目方向の中心間距離
 T:板厚
 W:割み巾



タタミ目

SUS304ウロコ研磨板

サイズ 重量 厚さ	1000×2000	1219×2438
	1枚重量	1枚重量
0.4	6.34 kg	kg
0.5	7.93	
0.6	9.52	14.10
0.8	12.70	18.90
1.0	15.90	23.60
1.2	19.00	28.30
1.5	23.80	35.40
2.0	31.70	47.10
2.5	39.60	58.90
3.0	47.60	70.70

SUS301バネ板

3/4H 400×1000	
1枚重量	
0.1×300×1000	0.24 kg
0.2	0.63
0.3	0.95
0.4	1.27
0.5	1.59
0.6	1.90
0.8	2.54
1.0	3.17
1.2	3.81
1.5	4.76
2.0×320×1000	5.08